


# FP Lid applicator

FP Lid applicator are Designed to apply lids on bottoms in an automatic lines. The machine is designed to handle cartons of various sizes

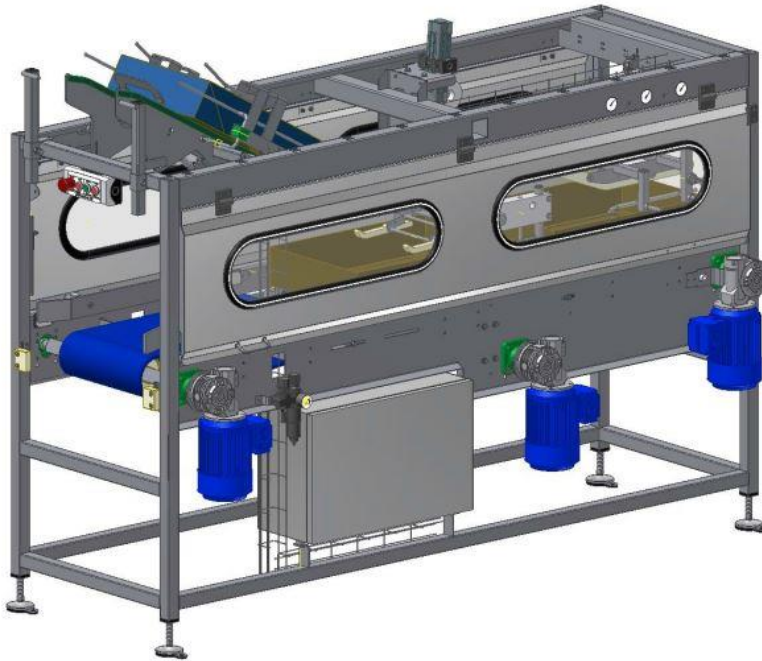

## Smart Lid applicator

The lid applicator JT-LP 20-02 Flexible Lid Applicator is installed in more than 100 packing lines and has proven it's quality in the fish industry.

Capacity: 13 cycles/min – depending on optimized product flow in front of and behind the machine.

Carton size: The machine is designed to handle cartons of various sizes. For trouble free application, we recommend that the lid is made 8-10mm wider and 10-15mm longer than the tray.

## Machine specification:

- Trays: width :382mm length : 577mm height: 114mm – inside measure
- Lids: width :392mm length : 592mm height: 114mm – inside measure
- Power consumption: 1,5Kw
- Voltage: 3x220VAC 50Hz (other voltages on request)
- Air consumption - average: 75 NI/min – at 13 cycles/min
- Air consumption – peak: 150 NI/min
- Air pressure: 6-7 bar
- Air connection: Minimum 8mm inside diameter.
- Compressed air quality: DIN ISO 8573-1 class 3
- Drive systems: Electrical motor and pneumatic cylinders.