


FP Lid applicator

FP Lid applicator are Designed to apply lids on bottoms in an automatic lines. The machine is designed to handle cartons of various sizes

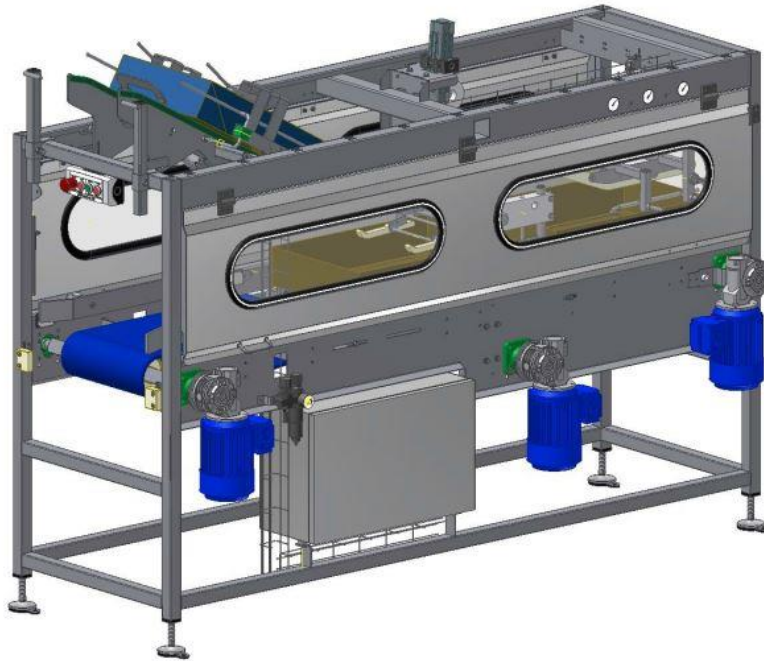

Smart Lid applicator

The lid applicator JT-LP 20-02 Flexible Lid Applicator is installed in more than 100 packing lines and has proven it's quality in the fish industry.

Capacity: 13 cycles/min – depending on optimized product flow in front of and behind the machine.

Carton size: The machine is designed to handle cartons of various sizes. For trouble free application, we recommend that the lid is made 8-10mm wider and 10-15mm longer than the tray.

Machine specification:

- Trays: width :382mm length : 577mm height: 114mm – inside measure
- Lids: width :392mm length : 592mm height: 114mm – inside measure
- Power consumption: 1,5Kw
- Voltage: 3x220VAC 50Hz (other voltages on request)
- Air consumption - average: 75 NI/min – at 13 cycles/min
- Air consumption – peak: 150 NI/min
- Air pressure: 6-7 bar
- Air connection: Minimum 8mm inside diameter.
- Compressed air quality: DIN ISO 8573-1 class 3
- Drive systems: Electrical motor and pneumatic cylinders.